


CO₂ Detection in a harsh Environment
Statox 501 Infratox HS CO₂

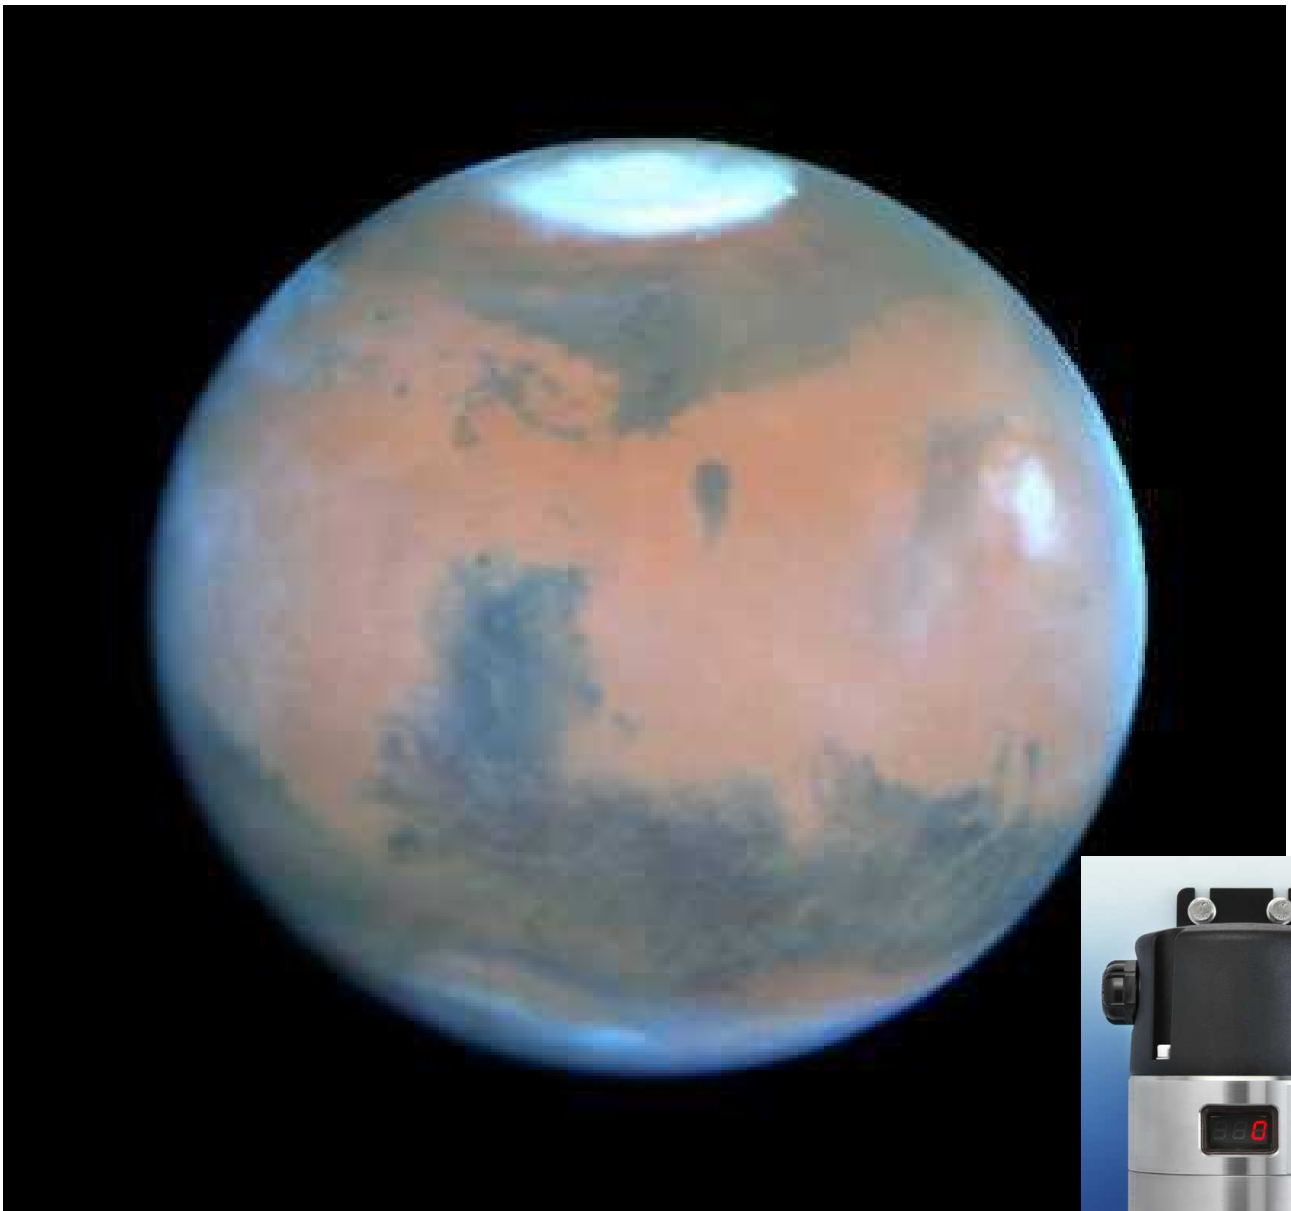

Carbon dioxide detection in industrial plants: Measuring range 0 – 5 % or 0 – 2 % vol.

For Martians – provided they exist – a carbon dioxide atmosphere might be their natural habitat. We earthlings can only tolerate low concentrations of this gas. It is true that we are using the special properties of CO₂ for many purposes, but in concentrations above 5000 ppm it can be hazardous to our health. Therefore it must be monitored.

In areas that are rarely accessed, such as beverage dispensing facilities, a leak detector might do as a warning device. Wherever people are present, such as workplaces in plants, industrial grade gas detection equipment is required. Here it is: Statox 501 Infratox HS.

This new version of the field proven Statox 501 Infratox HS for combustible gases operates as a 4 – 20 mA transmitter. It can be connected directly to a recording device, process control system, or the optional Statox 503 control module.

Its unmatched compact design makes it operable in any environment whether it is food industry, chemical industry, refineries, or cleaning facilities. This explosion proof instrument will do the job everywhere. It is water proof (rated IP 67). The housing materials (stainless steel and fiber-reinforced polyamide) are rugged and easy to clean.

Applications

- CO₂ fertilization
- Fermentation process
- Quick freezing
- Milling
- Storage / silo inertization
- Transportation
- Packaging
- Extraction
- Pest control
- CO₂ Cleaning
- Fire extinguishing

Technical Data

Product	Statox 501 Infratox HS CO ₂
Measuring range	0-2 or. 0-5 Vol.%
Article No.	561715, 561720
Measuring principle	2-channel NDIR
Detection limit	0,03 Vol.% CO ₂
Repeatability	< ± 2 %
Display	LED, three digit
Response time	t ₅₀ < 15s, t ₉₀ < 45s
Warm up time	20 s
Specifications reached	after 30 min
Operating temperature	-20°C to +60°C
Storage temperature	-20°C to +60°C
Humidity	0 - 99% r.F.
Pressure	800 - 1100 hPa
Power supply	24VDC (18-29VDC)
Power consumption	1 Watt
ATEX Approval	EEx de IIC T5
EMV	According to EN 50270



Compur Monitors GmbH & Co. KG
 Weißenseestraße 101
 D-81539 München
 Tel.: ++49 89 62038-0
 Fax: ++49 89 62038-184
 Email: compur@compur.de
 Internet: www.compur.com

Compur Monitors Inc.
 100 E Nasa Pkwy Suite 308
 USA - Webster TX 77598
 Tel.: ++1 281 338 7885
 Fax: ++1 281 557 7911
 Email: uscompur@compur.us
 Internet: www.compur.com

Compur Monitors BV
 De Veldoven 49
 NL - 3342 Gr Hendrik Ido Ambacht
 Tel.: ++31 78 682 0537
 Fax: ++31 78 682 1936
 Email: info@compur.nl
 Internet: www.compur.nl